

Ruger Avenue Reconstruction Project

Community Engagement Forum #1
January 17, 2024



Welcome!

Project Team

City of Janesville

- Karissa Chapman, Project Engineer
- Brad Reents, City Engineer


Project Design Consultant – MSA

- Brian Huibregtse, PE, PTOE – Project Manager
- Chad Wagner, PE – Lead Design Engineer



Ruger Avenue Project Limits

- **Limits:** Randall Avenue to Lexington Drive
- Complete Roadway Reconstruction
- WisDOT STP-Urban project with federal / local funding cost share
 - NEPA Process
 - Includes Section 106, Environmental Document, Section 4f Resources*, etc.
 - Facilities Development Manual Guidelines (FDM)
 - Americans with Disabilities Act (ADA) Compliance

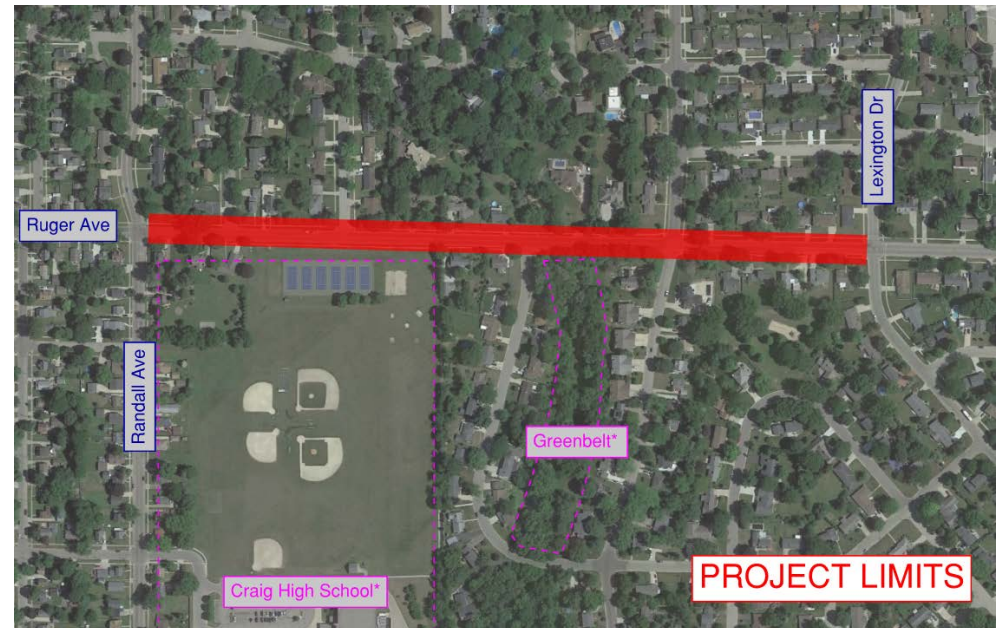

Ruger Avenue Reconstruction

- **Project will Include**
 - New pavement
 - New concrete curb & gutter
 - Removal of parking from one side
 - Marked bicycle lanes
 - Updated curb ramps
 - Spot sidewalk replacement (special assessments)
 - Spot storm sewer replacement
 - Isolated watermain adjustments
 - Review of sanitary sewer condition




Schedule

- Community Engagement Forum #1: January 2024
- Preliminary Plans (60%): October 2024
- Community Engagement Forum #2 (if necessary): Fall/Winter 2024
- Real Estate Acquisition Process: November 2024
- Final Plans (PS&E): August 2025
- Project Construction: Spring/Summer 2026




Existing Typical Section

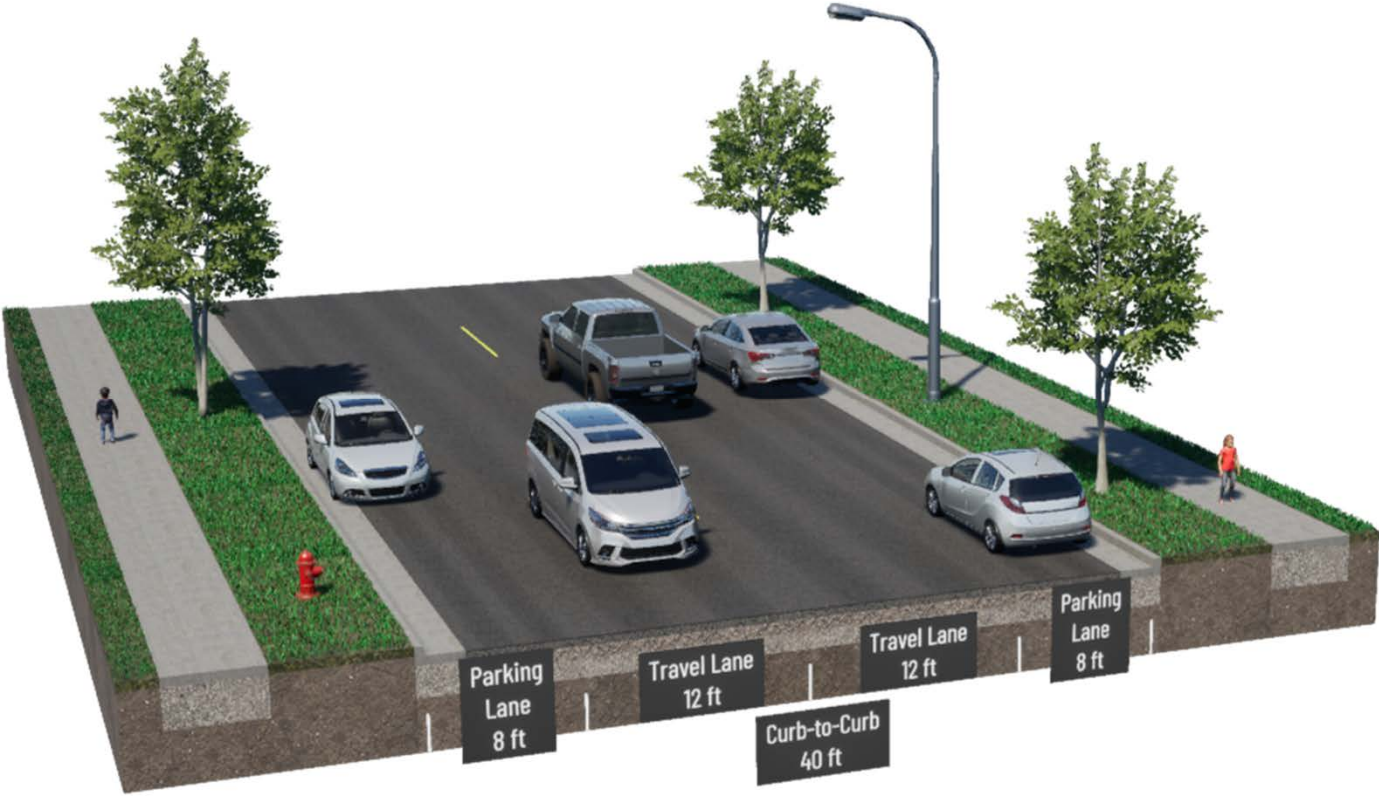


Typical Section Alternatives

Proposed typical section with parking on the south side:

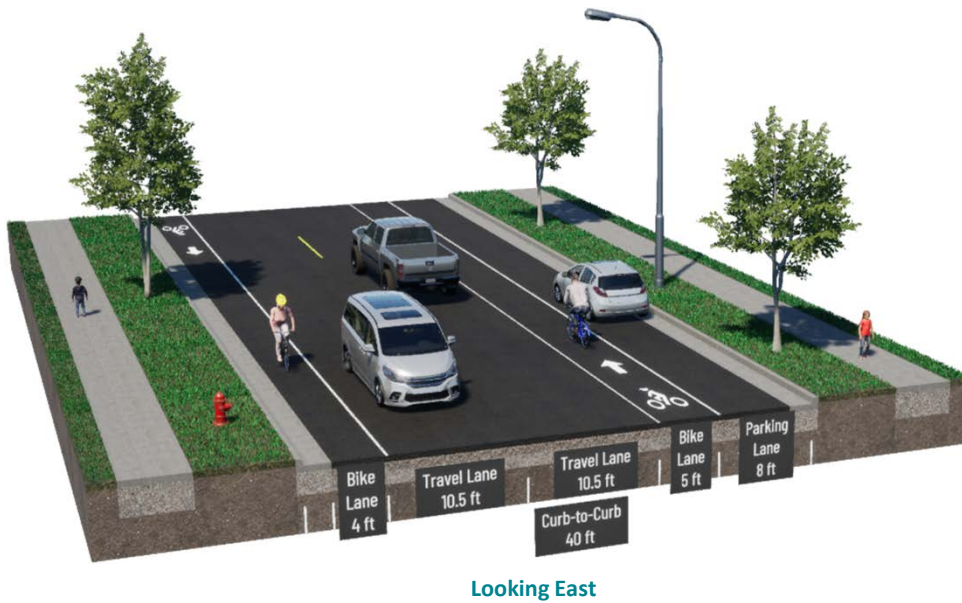

Proposed typical section with parking on the north side:

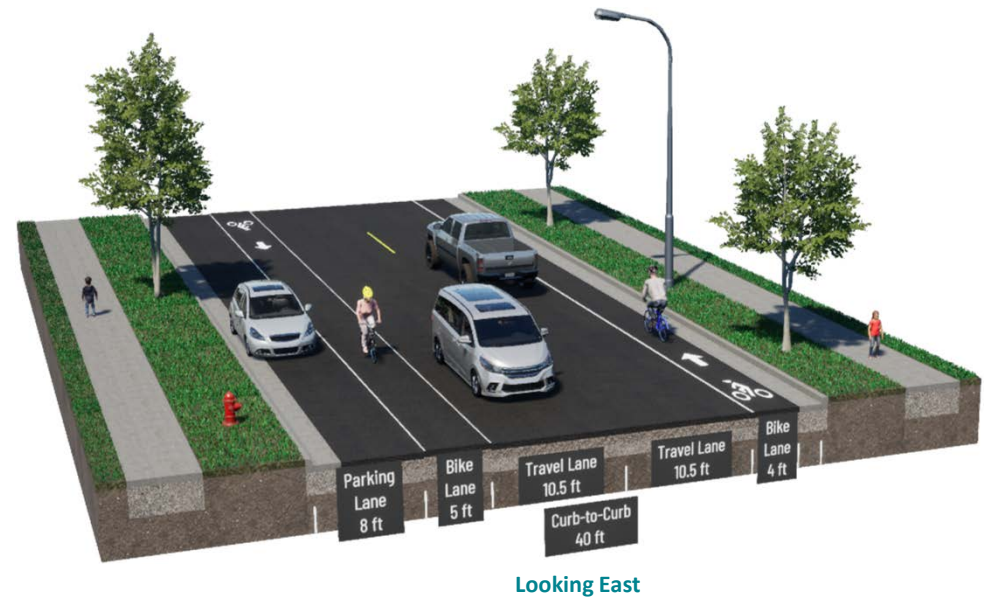

Parking Comparison

Estimated Parking Capacity			
	Randall Ave – Harmony Dr	Harmony Dr – Lexington Dr	Total
Northside	39	11	50
Southside	49	13	62

Ruger Ave Concept Plan Alternative 1 – Parking North Side



Ruger Ave Concept Plan Alternative 2 – Parking South Side




Construction Staging – Full Closure with Detour

- Closed to through traffic
- Access to Properties to be maintained as much and possible.
- Detour posted utilizing Randall Ave to E Milwaukee St to Pontiac Dr
- Duration : 4 - 5 Months



Next Steps

- Finalize our typical section
- Complete our environmental documentation requirements
- Determine real estate needs

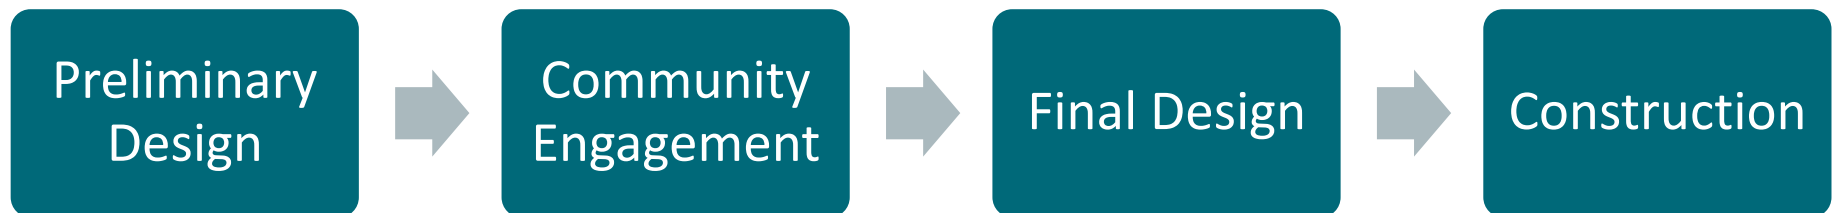

Open House

